


Traffic direction



7	Bolt M16x35, class 8.8 - Round head oval neck bolt, Nut M16, Washer $\Phi 40 \times 18 \times 4$	Round head oval neck bolt; ISO 4032	№ 8
6	Bolt M10x45, class 8.8 - ISO 4017, Nut M10	ISO 4017; ISO 4032	№ 7
5	Fishplate 40x40x4 mm with hole $\Phi 12$	S235JR-EN 10025-2	№ 6
4	Fishplate 100x40x5 mm with hole $\Phi 12$	S235JR-EN 10025-2	№ 5
3	Reinforcement post C110x47,5x20, L=300 mm, $\delta=4.0$ mm	S355JR-EN 10025-2	№ 4
2	Post C125x62.5x25, L=1630 mm, $\delta=4.0$ mm with hole for reinforcement post	S355JR-EN 10025-2	№ 3
1	Beam type 3N, L=4310 mm, $\delta=2.5$ mm	S355JR-EN 10025-2	№ 2

Designer:	eng. Daniel Kozuev	steel: S235JR-EN 10025-2 S355JR-EN 10025-2	Дата 2020	Мащаб 1:35
-----------	--------------------	---	--------------	---------------

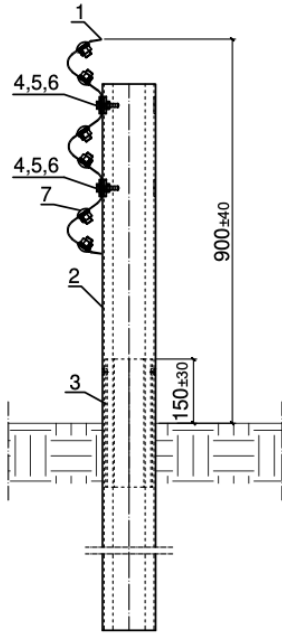

Technical requirements:
Coating - hot dip zinc galvanizing in accordance with EN 1461:2009

№ 1